




CITEL



Coaxial surge protector

CXF60-N/MF

- » Coaxial surge protector
- » DC-500 MHz
- » I_{max}: 6 kA
- » Bi-directional, series installed

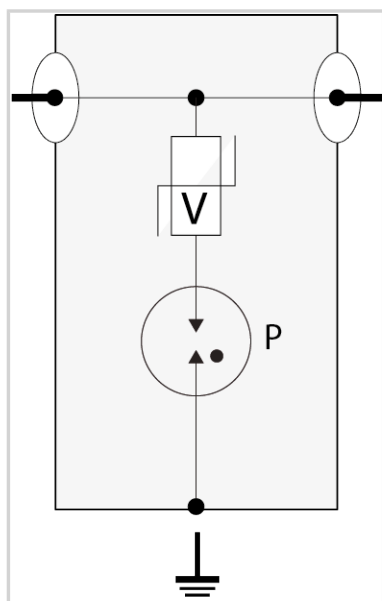

Electrical Characteristics		
Frequency range	f	DC-500 MHz
Insertion loss		< 0.2 dB
Return loss		> 19 dB
Impedance		50 ohms
VSWR		<1.25:1
Max. load current @25°C	IL	6 A
Max. discharge current max. withstand @ 8/20 µs by pole	I _{max}	6 kA
Protection mode(s)		Common mode
Protection level @1kV/µs (C3)	Up	< 800 V
Max RF Power		42 W
Mechanical Characteristics		
Connection to Network		Connector N Male/Female
Operating temperature	Tu	-50°C to +85°C
Protection rating		IP65
Standards		
Certification		UL 497E
Environmental standards		EU RoHS
RohS compliance		Yes
Part number		
62004		

